




Bearing de Mexico, S.A.

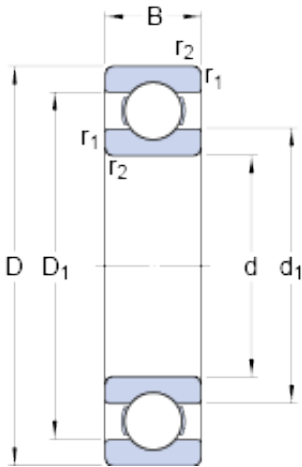

160 mm x 200 mm x 20 mm SKF 61832 deep groove ball bearings

Bearing No. 61832

61832 Bearing 2D drawings and 3D CAD models

| | |
|---|--------------------------|
| Size | 200x160x20 mm |
| Bore Diameter | 200 mm |
| Outer Diameter | 160 mm |
| Width | 20 mm |
| d | 160 mm |
| D | 200 mm |
| B | 20 mm |
| d ₁ | 172.6 mm |
| D ₁ | 187.1 mm |
| r _{1,2} - min. | 1.1 mm |
| d _a - min. | 166 mm |
| D _a - max. | 194 mm |
| r _a - max. | 1 mm |
| Basic dynamic load rating - C | 49.4 kN |
| Basic static load rating - C ₀ | 64 kN |
| Fatigue load limit - P _u | 2 kN |
| Reference speed | 6300 r/min |
| Limiting speed | 4000 r/min |
| Calculation factor - k _r | 0.015 |
| Calculation factor - f ₀ | 17.2 |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |



Bearing de Mexico, S.A.

| | |
|---------------------------------|---|
| Weight / Kilogram | 1.252 |
| Product Group | B00308 |
| Enclosure | Open |
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 160MM Bore; 200MM Outside Diameter; 20MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage |
| Other Features | Deep Groove |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.skf.com |
| Weight / LBS | 1.25 |
| Outside Diameter | 7.874 Inch 200 Millimeter |
| Outer Race Width | 0.787 Inch 20 Millimeter |
| Bore | 6.299 Inch 160 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| d ₁ | 172.6 mm |
| D ₁ | 187.1 mm |



Bearing de Mexico, S.A.

| | |
|--------------------------------|---------|
| $r_{1,2}$ min. | 1.1 mm |
| d_a min. | 166 mm |
| D_a max. | 194 mm |
| r_a max. | 1 mm |
| Basic dynamic load rating C | 49.4 kN |
| Basic static load rating C_0 | 64 kN |
| Fatigue load limit P_u | 2 kN |
| Calculation factor k_r | 0.015 |
| Calculation factor f_0 | 17.2 |
| Mass bearing | 1.25 kg |